

# High Speed Data Acquisition System with Printer

## 8460



The Model 8460 is a versatile high-speed data acquisition recorder with an integrated thermal printer. Measurement results can be viewed on the 15.4" touchscreen display, saved to the large internal hard drive, and printed on continuous 270mm wide-format paper.

With 3 slots for dedicated input modules, this system can be configured to your specific application. Choose any combination of universal, isolated high voltage, multiplexed, or strain gauge input modules for up to 36 analog inputs.

For capturing high speed or transient signals, the 8460 can simultaneously acquire and record 18 inputs at 1 MSa/s in memory mode. A variety of start and stop conditions are available including trigger on analog channel(s) level or edge, logic channel high or low, or through a designated date and time. You can also choose from a variety of actions to be performed when the recording is stopped including sending emails, printing data in memory, and changing the setup file. Additionally, the secondary file function allows you to record low and high-speed data in separate files to reduce file sizes and minimize storage usage.

The intuitive user interface makes setup easy, and measurement results can be viewed graphically or numerically on the display while data is simultaneously recorded or printed. Built-in analysis tools include a mathematical function editor and dedicated power quality analysis mode for analyzing single and 3-phase power networks. Display options include measured voltages and currents, calculated values, vector diagrams, and harmonics.

For integrating with external systems and devices, the 8460 provides digital inputs and alarm outputs. Logic inputs can be recorded with analog data, or used to start and stop recording. Alarms can be configured based on any combination of analog or logic channels, and can be used to control external devices or send email notifications. The 8460 also supports common synchronization protocols including IRIG, NTP, and PTP (client mode or Server mode with IRIG option installed).

Connect to the 8460 remotely via the built-in LAN interface or optional USB WiFi. You can remotely control the unit, transfer data and configuration files, and view live data on a PC.

### Features and benefits:

- Integrated 270 mm thermal paper printer
- 6-36 analog channels
- Up to 1 MSa/s sampling rate
- 4 measurement board types:
  - Universal (6 ch)
  - Multiplexed (12 ch)
  - Strain Gauge (6 ch)
  - High Voltage (6 ch)
- Temperature measurements with thermocouples and RTDs (Pt100, Pt200, Pt500, & Pt1000)
- 500 GB internal hard drive
- Power Analysis mode for 50 Hz, 60 Hz, 400 Hz, and 1 kHz single and 3-phase electrical networks
- Advanced calculations and user defined math functions
- 16 logic input channels
- Wide 15.4" touchscreen display
- Optional IRIG synchronization
- 4 USB host ports, 1 LAN interface, & 1 VGA output
- WiFi monitoring and control

### Applications


- Printed record of event activity with date and time stamp
- Measure signals ranging from strain gauge signals to large electrical systems
- Maintenance and failure analysis
- Power analysis of single and three phase systems

## Front panel



**15.4 inch touchscreen**  
TFT display with touchscreen  
to facilitate signal viewing and  
analysis


## Top panel

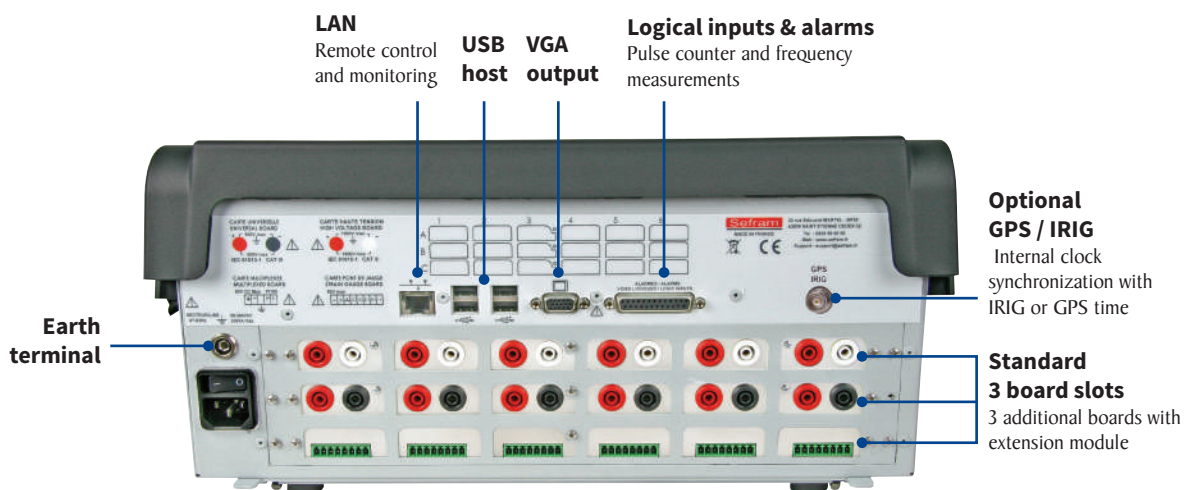


## Operation highlights




Channel setup displays parameters for up to 12 channels on a single screen

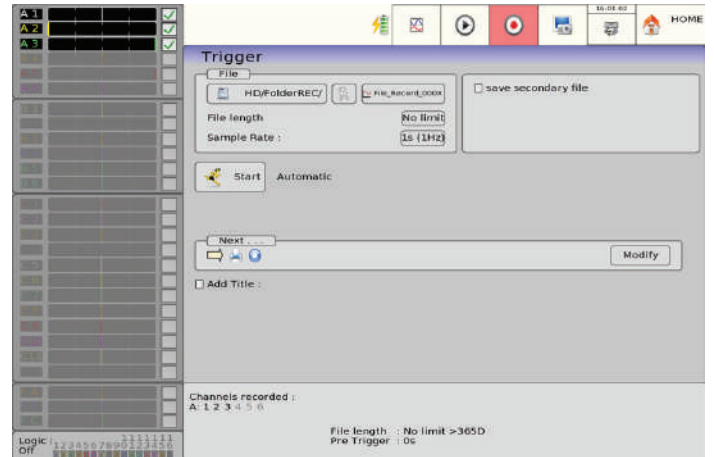


Comprehensive triggering capabilities: Configure triggers on analog and logic channels. Select from multiple combinations of thresholds, channels and conditions.

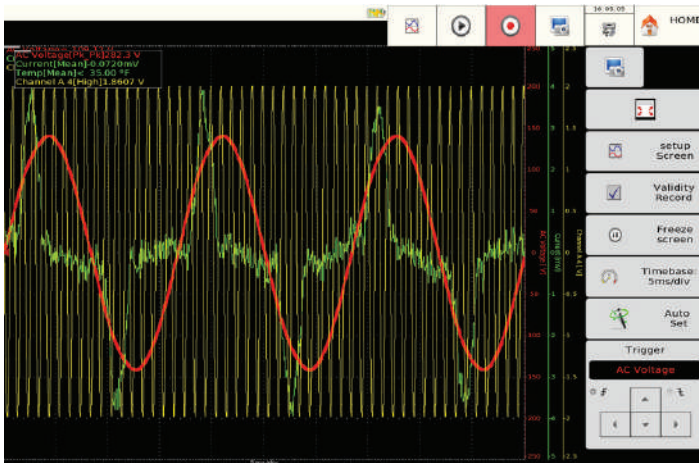


Oscilloscope like display mode with 100 kHz bandwidth

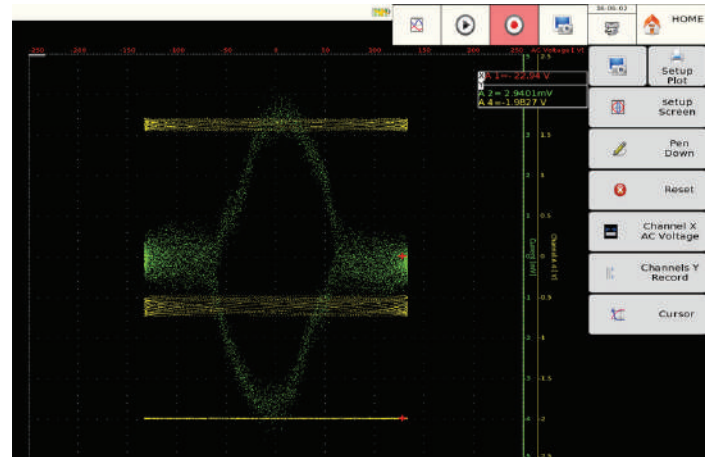

XY mode for plotting one varying signal versus another

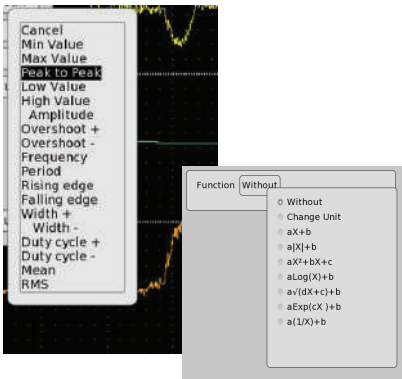



Use measurement calculations for on screen display, or software defined formulas on individual channels

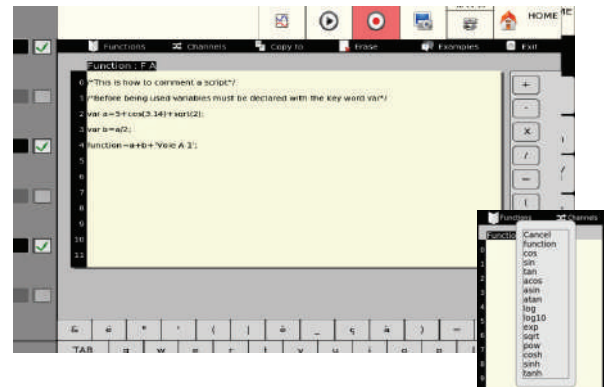

Create user defined formulas on multiple channels with the included text editor for even greater control. The results are shown as dedicated virtual channels for ease of measurement.


## The tools you need

### Energy / Power Analysis

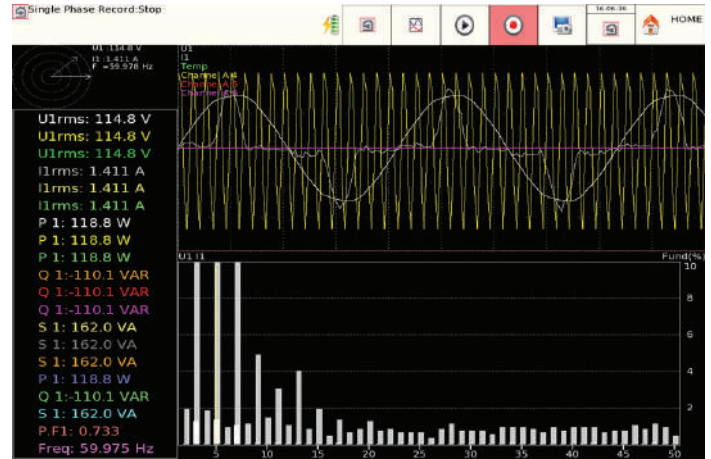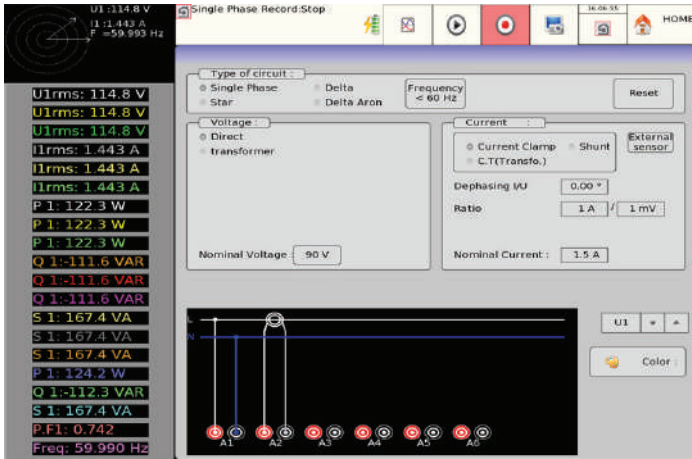

Analyze up to 4 power networks simultaneously in three phase configurations Delta, Delta (Aron), or Star. The real time display of Fresnel diagram, oscilloscope mode, and harmonics (up to 50th) measure and display voltage, current and frequency up to 1 kHz.

Sefram Viewer and Pilot for 8460 are license free software that can be downloaded from [www.bkprecision.com](http://www.bkprecision.com). The software tools provide the following features:

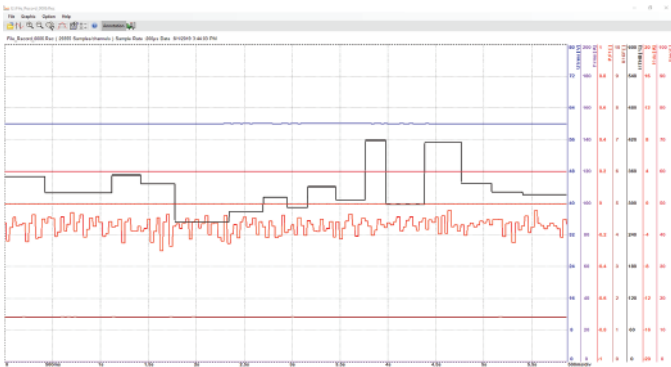

#### Sefram Viewer

- Post acquisition analysis
- Display measurement results in graphical or numerical format
- 7 math functions such as  $y=ax+b$ ,  $y=\ln(x)+b$ , and  $y=\exp(cx)+b$




#### Sefram Pilot for 8460

- Remote control and setup
- Channel and trigger configuration
- Export measurement data to a computer
- Start and stop recording
- Real time display

### Virtual Network Computing (VNC) capability


The recorder's built-in VNC provides a graphical desktop system to remotely control the instrument from a computer with a full graphical interface that replaces the instrument's front panel using a mouse and keyboard

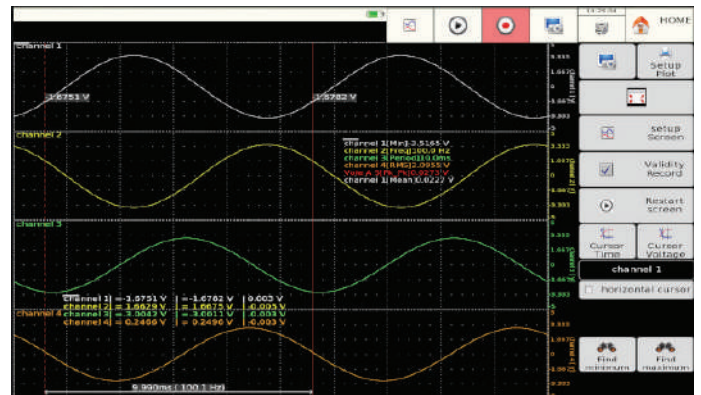

Full control of the Data Acquisition System on a computer or mobile device

## Measurement Boards

Configure the 8460 to fit your needs with any combination of module boards with up to 3 in the base unit.

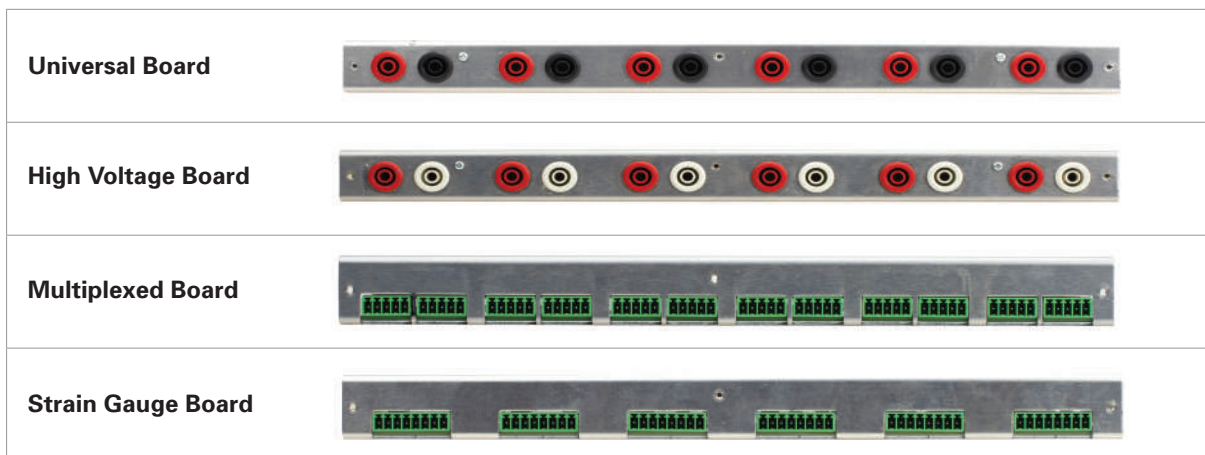

Measurement Boards				
	Universal	High Voltage	Multiplexed	Strain Gauge
Channels	6	6	12	6
Maximum Voltage	± 500 V or 424 VRMS	± 1000 V or 1000 VRMS	± 25 VDC	± 25 VDC
RMS Voltage	√	√	-	-
Resolution	14 bit	14 bit	16 bit	16 bit
Sampling Rate	1 MSa/s	1 MSa/s	5 kSa/s	100 kSa/s
Voltage	√	√	√	√
Current	√	√	√	-
Frequency	√	√	-	-
Thermocouple	√	-	√	√
Counter	√	√	-	-
Power Analysis	√	√	-	-
PRT Sensor	-	-	Pt100/Pt200/Pt500/Pt1000	Pt100/Pt1000

### Included accessories

Also included: AC mains adapter 100 / 240 V, 25 pin male connector and backshell, soft wipe, stylus, screwdriver.



One set of bare wire to banana adapters per channel



Rugged case

### Ordering information

Description	Base Unit	Measurement Boards				Options	
		Universal	High voltage	Multiplexed	Strain gauge	GPS	IRIG
Part Number	8460	984401000	916006000	984402000	984402500	984602500	984603000

The 8460 base can be ordered with any combination of up to 3 measurement boards and any number of options.

## Specifications, Base Unit

Note: All specifications apply to the unit after a temperature stabilization time of 30 minutes over an ambient temperature range of 23 °C ± 5 °C.

Power Analysis Function	
Networks	Single phase, 3 phase
Frequency	50-60 Hz, 400 Hz, 1000 Hz
Display	Fresnel diagram, oscilloscope, data
Measurements	Mean value, RMS, peak, crest factor, THD and DF for voltage & current, active, reactive and apparent power, power factor (ø)
Harmonics	Calculated up to rank 50, with display and record

Logic Input and Alarms	
Channels	16
TTL Maximum Voltage	24 V
Sampling Interval	1 µs (1 MSa/s) each channel
Sensor Supply	9 to 15 VDC
Alarms	A & B, 0 to 5 V output

IRIG Option	
Accuracy	5 ms
Sampling Time Accuracy	10 E -12 (only for sampling rate ≥ 200 µs)
IRIG Formats	IRIG-AI33, AI32, A003, A002, BI23, BI22, B003, B002 and AFNOR NFS 87-500
IRIG Signal Amplitude Range	600 mVpp to 8 Vpp
Input Impedance	50 Ω

GPS Option	
Output Accuracy	< ± 100 ns (TCXO, OCXO LQ) < ± 50 ns (OCXO MQ, OCXO HQ)
Output Frequency	10 MHz TTL
Resolution	100 ns
Generated Time Codes	B002, BI22, B003, BI23, B006, BI26, B007, BI27, IEEE1344, C37.118, AFNOR
Input Impedance	50 Ω

Data Acquisition System		
Memory Mode	Fastest sampling rate*	1 MSa/s up to 36 channels
	Memory	128 M words
File Mode (SSD disk streaming)	Fastest sampling rate*	1 MSa/s up to 6 channels
	Internal SSD memory	500 GB (2 TB option)

\* Universal and high voltage measurement board

Printer		
Paper Width		270 mm
Paper Speed	Direct mode	1 mm/hr to 200 mm/sec
	Mixed mode	1 mm/hr to 50 mm/sec
	Transcription mode	10 mm/sec
	External control mode	50 mm/sec
Resolution	Y axis	8 dots/mm
	X axis	16 dots/mm
	XY mode	8 dots/mm (both axis)

General	
Internal Solid State Memory	500 GB (2 TB optional)
Operating Temperature	0 to 40 °C
Storage Temperature	-20 to 60 °C
Display	15.4" TFT LCD 1280 x 800 dots
Power Supply	99 VAC to 264 VAC, 47 to 63 Hz (80 VA max)
Interfaces	4 USB host ports, VGA, LAN
Weight (one card installed)	24.25 lbs (11 kg)
Dimensions (W x H x D)	15.57" x 17.32" x 7.68" (370 x 440 x 195 mm)
Warranty	2 Years
Supplied Accessories	Power cord, 25 pin male connector and backshell, rugged carrying case, bare wire to banana adapters, multiplexed board connectors (12), strain gauge board connectors (6), Stylus, soft wipe, screw-driver, calibration certificate and test report

## Specifications, Measurement Boards

Note: All specifications apply to the unit after a temperature stabilization time of 30 minutes over an ambient temperature range of 23 °C ± 5 °C.

Universal Input Board		
Number of Channels	6	
<b>Voltage</b>		
Maximum Input Voltage	± 500 VDC or 424 VRMS	
Accuracy	± 0.1% of the full scale	
DC Voltage Ranges	± 0.5 mV to ± 500 V	
AC Voltage Ranges	200 mV to 500 V	
RMS Voltage Accuracy	1% of full range	
Response Time	100 ms typical (40 ms to 50 Hz)	
Crest Factor	2	
Input Impedance (DC)	1 MΩ for ranges > 1 V, 25 MΩ for ranges < 1 V	
Input Capacitance	150 pF	
High Input Impedance Option	10 MΩ for ranges > 1 V, 25 MΩ for ranges < 1 V	
Channel Isolation	> 100 MΩ at 1500 VDC	
Safety	CAT III 500 V	
<b>Bandwidth and Filters</b>		
Bandwidth (-3 dB)	100 kHz	
True RMS Bandwidth	5 Hz to 500 Hz	
Analog Filters	100 Hz, 1 kHz, 10 kHz	
Slope	40 dB/decade	
Digital Filters	< 100 Hz	
Sensitivity	100 mV RMS min.	
Duty Cycle	10%	
Frequency Range	1 Hz to 100 kHz	
Basic Accuracy	0.02% of full scale	
<b>Data Acquisition</b>		
Resolution	14 bits	
Sampling Interval	1 μs (1 MSa/s) each channel	
RMS Sampling Interval	200 μs (5 kSa/s) each channel	
<b>Temperature with Thermocouple</b>		
Sensor Range by Type (cold junction compensation: ± 1.25 °C)	J	-346 °F to 2192 °F (-210 °C to 1200 °C)
	K	-418 °F to 2498 °F (-250 °C to 1370 °C)
	T	-328 °F to 752 °F (-200 °C to 400 °C)
	S	-58 °F to 3200 °F (-50 °C to 1760 °C)
	B	392 °F to 3308 °F (200 °C to 1820 °C)
	E	-418 °F to 1832 °F (-250 °C to 1000 °C)
	N	-418 °F to 2372 °F (-250 °C to 1300 °C)
	C	32 °F to 4208 °F (0 °C to 2320 °C)
	L	-328 °F to 1652 °F (-200 °C to 900 °C)
	R	-40 °F to 2732 °F (-40 °C to 1500 °C)

High Voltage Board	
Number of Channels	6
<b>Voltage</b>	
Maximum Input Voltage	± 1000 VDC or 1000 VRMS
Accuracy	± 0.2% of the full scale
DC Voltage Ranges	± 50 mV to ± 1000 V
AC Voltage Ranges	100 mV to 1000 VRMS
RMS Voltage Accuracy	1% of full range
Response Time	100 ms typical (40 ms to 50 Hz)
Crest Factor	2.2
Input Impedance	11 MΩ for ranges < 10 V, 25 MΩ for ranges ≥ 1 V
Input Capacitance	150 pF
Channel Isolation	> 100 MΩ at 1500 VDC
Safety	CAT III 1000 V and CAT IV 600 V
<b>Bandwidth and Filters</b>	
Bandwidth	26 kHz
True RMS Bandwidth	5 Hz to 500 Hz
Analog Filters	100 Hz, 1 kHz, 10 kHz
Slope	40 dB/decade
Digital Filters	< 100 Hz
Sensitivity	300 mV RMS min.
Duty Cycle	10%
Frequency Range	10 to 100 kHz
Basic Accuracy	0.2% of full scale
<b>Data Acquisition</b>	
Resolution	14 bits
Sampling Interval	1 μs (1 MSa/s) each channel
RMS Sampling Interval	200 μs (5 kSa/s) each channel

## Specifications, Measurement boards (cont.)

Note: All specifications apply to the unit after a temperature stabilization time of 30 minutes over an ambient temperature range of 23 °C ± 5 °C.

Multiplexed Board		
Number of Channels	12	
<b>Voltage</b>		
Maximum Input Voltage	± 25 VDC	
DC Voltage Range	± 0.5 mV to ± 25 V	
Accuracy	± 0.1% of the full scale	
Input Impedance (DC)	1 MΩ for ranges > 2 V, 10 MΩ for ranges < 2 V	
Input Capacitance	150 pF	
<b>Bandwidth and Filters</b>		
Digital Filters	< 100 Hz	
<b>Data Acquisition</b>		
Resolution	16 bits	
Sampling Interval	200 μs (5 kSa/s) each channel	
<b>Temperature with Thermocouple</b>		
Sensor Range by Type (cold junction compensation: ± 1.25 °C)	J	-346 °F to 2192 °F (-210 °C to 1200 °C)
	K	-418 °F to 2498 °F (-250 °C to 1370 °C)
	T	-328 °F to 752 °F (-200 °C to 400 °C)
	S	-58 °F to 3200 °F (-50 °C to 1760 °C)
	B	392 °F to 3308 °F (200 °C to 1820 °C)
	E	-418 °F to 1832 °F (-250 °C to 1000 °C)
	N	-418 °F to 2372 °F (-250 °C to 1300 °C)
	C	32 °F to 4208 °F (0 °C to 2320 °C)
	L	-328 °F to 1652 °F (-200 °C to 900 °C)
R	-40 °F to 2732 °F (-40 °C to 1500 °C)	
<b>Temperature with RTD</b>		
Current	Pt100	1.0 mA
	Pt200	0.5 mA
	Pt500	0.2 mA
	Pt1000	0.1 mA
Temperature Range	-392 °F to 1562 °F (-200 °C to +850 °C)	
Measurements	2, 3, 4 wires	
Accuracy at 20 °C	± 0.03 °C	

Strain Gauge Board		
Number of channels	6	
<b>Strain Gauge</b>		
Units	μStr	
Bridge Type	Full Bridge, Half Bridge	
Bridge Voltage	± 1 V and ± 2.5 V	
Accuracy	± 0.2% of the full scale	
Ranges (μStr)	1,000, 2,000, 5,000, 10,000	
<b>Voltage</b>		
Maximum Input Voltage	50 VDC	
Accuracy	± 0.2% of the full scale	
DC Voltage Range	1 mV to 50 V	
Input Impedance	2 MΩ for ranges < 1 V, 1 MΩ for ranges > 1 V	
<b>Bandwidth and Filters</b>		
Bandwidth (-3 dB)	18 kHz	
Analog Filters	100 Hz, 1 kHz	
Digital Filters	< 100 Hz	
<b>Data Acquisition</b>		
Resolution	16 bits	
Sampling Interval	10 μs (100 kSa/s) each channel	
<b>Temperature with Thermocouple</b>		
Sensor Range by Type (cold junction compensation: ± 1.25 °C)	J	-346 °F to 2192 °F (-210 °C to 1200 °C)
	K	-418 °F to 2498 °F (-250 °C to 1370 °C)
	T	-328 °F to 752 °F (-200 °C to 400 °C)
	S	-58 °F to 3200 °F (-50 °C to 1760 °C)
	B	392 °F to 3308 °F (200 °C to 1820 °C)
	E	-418 °F to 1832 °F (-250 °C to 1000 °C)
	N	-418 °F to 2372 °F (-250 °C to 1300 °C)
	C	32 °F to 4208 °F (0 °C to 2320 °C)
	L	-328 °F to 1652 °F (-200 °C to 900 °C)
R	-40 °F to 2732 °F (-40 °C to 1500 °C)	
<b>Temperature with RTD</b>		
Current	Pt100	1.0 mA
	Pt200	0.5 mA
Temperature Range	-392 °F to 1562 °F (-200 °C to +850 °C)	
Measurements	2, 3, 4 wires	
Accuracy at 20 °C	± 0.03 °C	

# BK PRECISION

## About B&K Precision

For more than 70 years, B&K Precision has provided reliable and value-priced test and measurement instruments worldwide.

Our headquarters in Yorba Linda, California houses our administrative and executive functions as well as sales and marketing, design, service, and repair. Our European customers are most familiar with B&K through our French subsidiary, Sefram. Engineers in Asia know us through our B+K Precision Taiwan operation. The independent service centers in Singapore and Brasil service customers in Singapore, Malaysia, Vietnam, Indonesia and South America, respectively.



● B&K Precision group member ● Independent service center ● Service center location

## Quality Management System

B&K Precision Corporation is an ISO9001 registered company employing traceable quality management practices for all processes including product development, service, and calibration.

ISO9001:2015

Certification body NSF-ISR  
Certificate number 6Z241-IS8



NSF-ISR

Registered to ISO 9001

## Video Library

View product overviews, demonstrations, and application videos in English, Spanish and Portuguese.

<http://www.youtube.com/user/BKPrecisionVideos>

## Product Applications

Browse all of our supported product and mobile applications.

<http://bkprecision.com/product-applications>



## About Sefram

Established in 1947, Sefram has been designing and manufacturing data recorders for more than 70 years. Sefram joined the test and measurement division of Schlumberger in 1978, and has been a subsidiary of B&K Precision since 2004. Certified ISO 9001, Sefram's strategy is to provide innovative and high-quality test and measurement products for electronic and electrical applications.

[Sefram Video Library](#)